


General

Top layer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 1506mm (59-5/16 inch)
	Width: 166mm (6-1/2 inch)
	Thickness: 10mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevel	4 bevels (4x0.5mm)
Gloss	Super matt (3)
Structure	Brushed
Backing	Real Wood
Density	850kg/m ³
Weight/sqm	7kg
Connection System	Unifit X
Installation type	Floating
Standard Colors	<u>Oaks</u> : Essence, Silk, Dune, Sky, Valley, Mountain Oak

Product composition

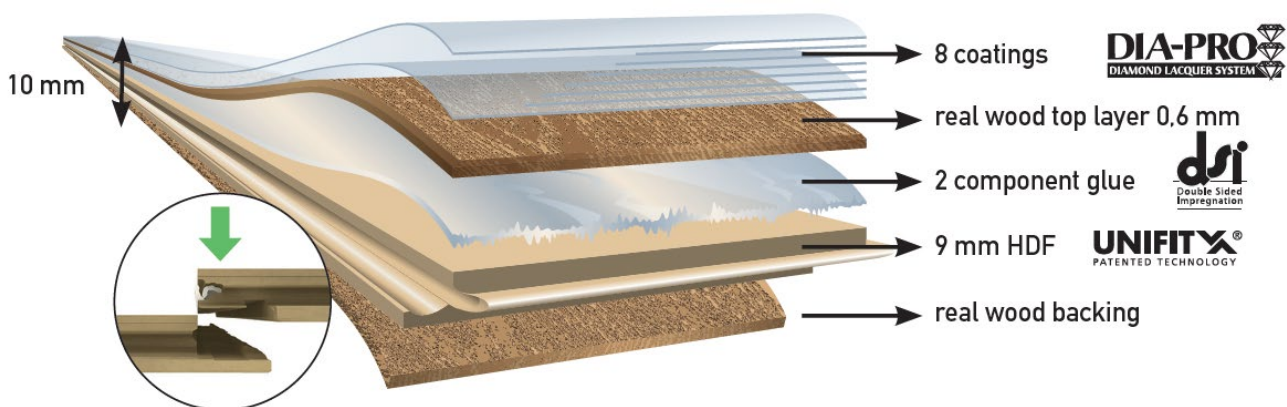

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	33
CE Certification	EN14342:2013
Warranty	Residential limited lifetime warranty Commercial use: 10 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.073m ² K/W there is a minimal waste of energy
Thermal resistance	0,073m ² K/W
Thermal conduction	0,14W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	8 boards Surface 2,000 m ² (21.53 sq.ft) Gross weight 17,3 kg (38 lbs)
Pallet	72 boxes Surface 144,00 m ² (1550 sq.ft) Gross weight 1260 kg (2778 lbs)

